

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 April 2004 (22.04.2004)

PCT

(10) International Publication Number
WO 2004/032983 A1

(51) International Patent Classification⁷: **A61L 9/12**,
9/03, A01M 1/20

(21) International Application Number:
PCT/US2003/030021

(22) International Filing Date:
19 September 2003 (19.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/266,512 8 October 2002 (08.10.2002) US

(71) Applicant: **S. C. JOHNSON & SON, INC.** [US/US];
1525 Howe Street, Racine, WI 53403 (US).

(72) Inventors: **KOTARY, Kara, L.**; 3611 Mercury Lane,
Racine, WI 53404 (US). **BUCHAKLIAN, Adam**,

H.; 1726 Steeple Drive, East Troy, WI 53120 (US).
KOPANIC, Robert, J.; 813 Arthur Avenue, Racine, WI
53405 (US). **VARANASI, Padma, P.**; 2 Cherrywood
Court, Racine, WI 53402 (US).


(74) Agent: **MILLER, Robert, A.**; S. C. JOHNSON & SON,
INC., 1525 Howe Street, Racine, WI 53403 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: WICK-BASED DELIVERY SYSTEM WITH WICK MADE OF DIFFERENT COMPOSITE MATERIALS

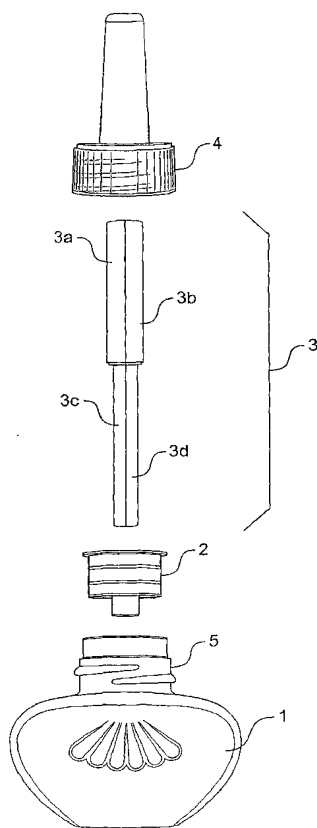

(57) Abstract: A composite wick (3) for delivering two liquids with different properties to a surface includes a first section (3a, 3c) provided for delivering a first liquid to the surface of the wick and a second section (3b, 3d) provided for delivering a second liquid to the surface of the wick. Preferably, the first section (3a, 3c) is made of hydrophobic materials and the second section (3b, 3d) is made of hydrophilic materials. Also, a composite wick (3) includes a first section made of either a porous ceramic-based material or a porous sand-based material and a second section made of a porous plastic material, wherein the first and second section preferably are formed as concentric cylinders, with the first section being disposed within the second section.

WO 2004/032983 A1



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

WICK-BASED DELIVERY SYSTEM WITH WICK MADE OF DIFFERENT COMPOSITE MATERIALS

5

BACKGROUND OF THE INVENTION

1. Field of the Invention

10 [0001] The present invention relates to a device for transporting liquids, such as insect repellent, fragrances, or insecticides, from a reservoir to a surface exposed to the ambient air.

2. Description of the Related Art

15 [0002] Devices that release vapors into the ambient air are well-known in the art. Generally, the purpose of these devices is to deodorize or disinfect the ambient air, or to distribute toxins into the air to kill or repel unwanted pests, such as mosquitoes.

[0003] To achieve the goal of dispensing vapors into the air, a number of methods has been
20 employed. For example, aerosol containers have been used to eject vapors into the air upon the activation of a trigger by the user. Other methods, however, utilize the evaporative properties of liquids, or other vaporizable materials, to cause vapors with desired properties to be distributed into the ambient air. One such evaporative method utilizes a wick to deliver a vaporizable liquid from a reservoir to a surface exposed to the ambient air. As the liquid
25 reaches the exposed surface, the liquid is vaporized and dispersed into the ambient air. The exposed surface may be either the surface of the wick or the surface of another body in fluid communication with the wick.

[0004] An example of a wick-based, controlled release device is disclosed in U.S. Patent No.
30 2,277,377. This patent discloses a device that comprises a cotton wick surrounded by a sheath made of bentonite, a clay-like substance. The device is inserted into a reservoir to lift

liquid from the reservoir to the surface of the bentonite sheath. Another method for transporting a liquid to a surface is described in U.S. Patent No. 4,913,350. This patent discloses an air-freshening device that uses an external, non-porous capillary member to transport the liquid from a reservoir to a surface exposed to the ambient air.

5

[0005] Difficulties can arise, however, when the liquid that is to be transported consists of a mixture of water-based liquids and oil-based liquids. In particular, the oil-based liquids are usually embedded in the water-based liquids and, therefore, the oil-based liquids do not easily reach the exposed surface. Therefore, there is a need for an improved method for transporting water-based and oil-based liquids from a reservoir to a surface.

10

[0006] Although not in the field of fragrance or insecticide release, several techniques have been used to separate oil-based and water-based liquids from one another. For example, U.S. Patent No. 5,006,264 relates to a method for siphoning water and oil from a mixture of the two. Also, British Patent Specification No. 628,464 discloses that hydrophobic and hydrophilic porous members can be used to separate a mixture of oil-based liquids and water-based liquids. Both of these patents disclose methods of separating oil and water. However, they do not disclose transporting two different types of liquids (i.e., water-based and oil-based) to a surface so that they are in close proximity to one another.

15

20

SUMMARY OF THE INVENTION

[0007] In one aspect, the present invention provides a composite wick for delivering two liquids with different properties to a surface. The wick comprises a first section provided for delivering a first liquid to the surface of the wick and a second section provided for delivering a second liquid to the surface of the wick.

25

[0008] In another aspect, the present invention provides a device comprising a container for holding a mixture that contains oil-based and water-based liquids, and a porous wick. The

porous wick has a first section comprising hydrophobic material and a second section comprising hydrophilic material. The porous wick is positioned so that a lower region of the porous wick will be in contact with the mixture and an upper region of the porous wick is exposed to the ambient air. The first section and the second section will be in contact with
5 the mixture and the ambient air.

[0009] In another aspect, the present invention provides a device comprising a container for holding a mixture that contains both oil-based and water-based liquids, and a porous wick that has a first section comprising hydrophobic material and a second section comprising
10 hydrophilic material. The container has an opening at its top surface and the porous wick is positioned in the opening of the container such that a lower region of the porous wick will be in contact with the mixture and an upper region of the porous wick is exposed to the ambient air. The opening in the container is substantially sealed by the porous wick.

15 [0010] In another aspect, the present invention provides a device comprising a container for holding a mixture that contains both oil-based and water-based liquids, and a capillary member that has a first section comprising hydrophobic material and a second section comprising hydrophilic material. The capillary member is positioned such that a lower region of the capillary member will be in contact with the mixture and an upper region of the
20 capillary member is exposed to the ambient air. The first section and the second section will be in contact with the mixture and the ambient air.

[0011] In another aspect, the present invention provides a device that comprises a container for holding an oil-based liquid and a water-based liquid, and a porous wick that has a first
25 section comprising hydrophobic material and a second section comprising hydrophilic material. The container has separate compartments for holding each liquid. Also, the porous wick is positioned so that a lower region of the first section will be in contact with the oil-

based liquid and a lower region of the second section will be in contact with the water-based liquid, and an upper region of both the first and the second sections is exposed to the ambient air.

5 **[0012]** In a further aspect, the present invention provides a device comprising a mixture that contains oil-based and water-based liquids, a container for holding the mixture, and a porous wick. The porous wick has a first section comprising hydrophobic material and a second section comprising hydrophilic material. The porous wick is positioned so that a lower region of the porous wick is in contact with the mixture and an upper region of the porous
10 wick is exposed to the ambient air. The first section and the second section are in contact with the mixture and the ambient air.

[0013] In another aspect, the present invention provides a device comprising a mixture that contains both oil-based and water-based liquids, a container for holding the mixture, and a
15 porous wick that has a first section comprising hydrophobic material and a second section comprising hydrophilic material. The container has an opening at its top surface and the porous wick is positioned in the opening of the container such that a lower region of the porous wick is in contact with the mixture and an upper region of the porous wick is exposed to the ambient air. The opening in the container is substantially sealed by the porous wick.

20

[0014] In yet another aspect, the present invention provides a device comprising a mixture that contains both oil-based and water-based liquids, a container for holding the mixture, and a capillary member that has a first section comprising hydrophobic material and a second section comprising hydrophilic material. The capillary member is positioned such that a
25 lower region of the capillary member is in contact with the mixture and an upper region of the capillary member is exposed to the ambient air. The first section and the second section are in contact with the mixture and the ambient air.

[0015] In still another aspect, the present invention provides a device that comprises an oil-based liquid and a water-based liquid, a container for holding both liquids, and a porous wick that has a first section comprising hydrophobic material and a second section comprising hydrophilic material. The container has separate compartments for holding each liquid.

5 Also, the porous wick is positioned so that a lower region of the first section is in contact with the oil-based liquid and a lower region of the second section is in contact with the water-based liquid, and an upper region of both the first and the second sections is exposed to the ambient air.

10 [0016] In a still further aspect, the present invention provides a composite wick for transporting a liquid to a surface. The wick includes a first section made of either a porous ceramic-based material or a porous sand-based material and a second section made of a porous plastic material. Preferably, the first and second sections are formed as concentric cylinders, with the first section being disposed within the second section.

15

[0017] In yet another aspect, the present invention provides a device that comprises a container for holding a liquid, the container having an opening therein, and a porous wick, having a first section made of either a ceramic-based material or a sand-based material and a second section made of a plastic material. The opening in the container is substantially
20 sealed by the porous wick.

[0018] A better understanding of these and other features and advantages of the invention may be had by reference to the drawings and to the accompanying description, in which preferred embodiments of the invention are illustrated and described.

25

BRIEF DESCRIPTION OF THE DRAWINGS

[0019] Figure 1 shows an exploded view of a wick-based delivery system according to a first preferred embodiment of the present invention.

[0020] Figure 2A shows a top view of the wick shown in Figure 1.

5 [0021] Figure 2B shows a top view of a wick according to another preferred embodiment of the present invention.

[0022] Figure 2C shows a top view of a wick according to yet another preferred embodiment of the present invention.

10 [0023] Figure 2D shows a top view of a wick according to still another preferred embodiment of the present invention.

[0024] Figure 3 shows a side view of a wick according to still another preferred embodiment of the present invention.

15

[0025] Figure 4 shows a view of a wick-based delivery system according to the present invention being utilized in conjunction with an optional electric plug-in heater.

20 [0026] Figure 5A shows a top view of a wick according to yet another preferred embodiment of the present invention.

[0027] Figure 5B is a cross-sectional view taken along section line A-A in Figure 5A.

25 [0028] Throughout the figures, like or corresponding reference numerals have been used for like or corresponding parts.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0029] A first preferred embodiment of the present invention relates to a system for
5 transporting a mixture of oil-based liquids and water-based liquids from a reservoir to a
surface that is exposed to the ambient air. In its simplest form, the device of this invention
comprises a container for holding oil-based and water-based liquids, and a two-section wick
for transporting the oil-based material and the water-based material from the container to an
upper surface of the wick.

10 [0030] The container can be formed in a variety of shapes. In Figure 1, for example, the
container is a bottle 1 of conventional shape. A wick 3 is shaped so that it fits snugly into the
neck 5 of the bottle 1. The wick 3 is long enough so that its bottom surfaces come into
contact with the liquid in the bottle 1 and its top surface is exposed to the ambient air. (The
15 level of the liquid is not shown in the bottle 1.) It is preferable to use a neck closure 2, such
as that shown in Figure 1, to hold the wick 3 in place and to prevent leakage around the neck
5 of the bottle 1. The fit between the neck closure 2 and the bottle 1 should be tight enough
to prevent leakage of the liquid from the bottle 1. Likewise, the fit between the neck closure
2 and the wick 3 should be sufficiently tight to prevent leakage of the liquid from the bottle 1.

20 [0031] The neck closure 2 or neck 5 of the bottle 1 may be formed with a small hole (e.g., a
vent-hole) to help counter the effects of a vacuum that can form in the head-space of the
bottle 1. The wick 3 transports the liquid to the surface of the wick 3 by a principle called
25 capillary action. In particular, the wick material contains numerous pores, and these pores act
as capillaries, which cause the liquid to be drawn into them. As the liquid is drawn from the
bottle 1 and transported up the porous wick 3, a vacuum is created in the head-space of the
bottle 1. The formation of a vacuum in the head-space of the bottle 1 decreases the rate that
the liquid is wicked from the bottle 1 to the surface. Of course, this decrease in the wicking

rate translates directly into a decrease in the release rate of the liquid to the ambient air. Accordingly, in order to combat the formation of the vacuum in the head-space, it is often preferable to form a vent-hole in the vicinity of the head-space of the bottle 1.

5 [0032] In addition, the neck 5 of the bottle 1 can be shaped so that a cover 4 can be securely fastened over the wick 3 and neck closure 2. For example, the outer neck 5 of the bottle 1 may be threaded so that a cover 4 can be screwed on top of the bottle 1 when the device is not in use.

10 [0033] A mixture of oil-based liquids and water-based liquids is added to the bottle 1 in liquid form. The mixture added to the bottle 1 can comprise any variety of materials. If the purpose of the device is to deodorize the air, for example, the mixture can be a liquid combination of fragrances and other liquids which act as the medium for carrying the fragrances.

15

[0034] The present invention is also preferable for use as an insect control product. Insecticides kill insects upon contact with the insecticide or upon ingestion of the insecticide by the insect. Because insecticides work upon physical contact, the insects must be attracted to the insecticide in order for the use of the insecticide to be effective. This is generally
20 accomplished by using a bait or attractant. Since insects need water for their survival, water-based liquids are often used for this purpose. However, it has been found that it is preferable to transport the insecticide in oil-based liquids. Accordingly, we have found that it is preferable to combine water-based liquids (serving as the bait) and oil-based liquids (carrying the insecticide) for use in the present invention.

25

[0035] The bottle 1 and the neck closure 2 can be made of any suitable material that is leakproof. Of course, the size of the opening in the bottle 1 and the size of the neck closure 2 are dependent upon each other and upon the size of the wick 3 that is to be used with the device.

[0036] The wick **3** can be made of a variety of materials, depending on the application. We prefer that the wick **3** be rigid enough to provide minimal contact area with the surface that the wick **3** comes in contact with. In the preferred embodiment shown in Figures 1 and 2A, the wick **3** comprises two sections made of different materials: hydrophobic sections **3a**, **3c** and hydrophilic sections **3b**, **3d**. In Figure 1, sections **3a**, **3c** and sections **3b**, **3d** are separately identified. However, section **3c** is the same material as section **3a**. Likewise, section **3d** is the same material as **3b**. Therefore, the hydrophobic sections **3a**, **3c** can be considered one section, and the hydrophilic sections **3b**, **3d** can be considered another section. These sections are separately identified in Figure 1 because the cylindrical shape of the wick **3** is narrowed at its lower region (i.e., sections **3c** and **3d**) in this example. This narrowing of the wick **3** is not required. The narrowing of the wick **3** is preferred, however, because it increases the surface area of the wick **3** that is exposed to the ambient air and aids in forming a tighter seal at the neck **5** area of the bottle **1**.

15

[0037] In Figure 1, hydrophobic sections **3a**, **3c** and hydrophilic sections **3b**, **3d** extend the length of the wick **3**. Although it is not necessary that each section extend the full length of the wick **3**, each section should be in contact with the liquid in the bottle **1** and the ambient air, in use.

20

[0038] The hydrophobic sections **3a**, **3c** of the wick **3** can be made of any material that is generally impermeable to water-based liquids. Polymeric wicks, for example, have been found to be effective for these purposes. In particular, wicks composed of ultra high molecular weight high density polyethylene (HDPE) are preferable. Such wicks **3** are generally comprised of blends of HDPE in particle form, and the blends are developed to meet the target pore characteristics of the wick **3**.

25

[0039] Preferably, the solubility parameter of the polymer is significantly different from that of any of the components contained in the liquid. This prevents the wick **3** from swelling or

other changes that may lead to a change in the pore size and porosity of the wick **3**, which would consequentially affect the release rate of the vaporizable liquid into the ambient air.

[0040] On the other hand, the hydrophilic sections **3b**, **3d** of the wick **3** can be made of any material that is generally impermeable to oil-based liquids. Ceramic-based materials, for example, have been found to be effective. Porous ceramic wicks are generally comprised of clay (non-porous) and organic materials (porous). Since the organic materials create the pores in the wick **3**, the two types of materials are blended together in a proportion that is appropriate to produce the desired final pore characteristics.

[0041] Although Figures 1 and 2A depict the hydrophobic and hydrophilic sections of the wick **3** as being side-by-side in the shape of adjoining half cylinders, the two types of sections can be formed in a variety of shapes. The only requirement is that both the hydrophobic section and the hydrophilic section must be in contact with the liquid in the bottle **1** and the ambient air, in use. For example, the two sections could be in the shape of concentric cylinders, as shown in Figure 2B. It is also not necessary that the hydrophobic section **3a** be on the outside of the hydrophilic section **3b** as shown in Figure 2B. In addition, there need not be only two sections of the wick **3**. In fact, it may be preferable to have a number of different sections. For example, it may be preferable to have a number of concentric cylinders, with alternating sections of hydrophobic and hydrophilic wick materials.

[0042] In addition, it is not necessary that the liquid be in the form of a mixture. Alternatively, the interior of the bottle **1** can consist of multiple compartments that store the oil-based liquids and water-based liquids separately. It is possible, for example, to place the oil-based liquid into one compartment and the water-based material into a second compartment. If the system is designed in this manner, then the wick **3** would have to be altered accordingly.

[0043] As shown in Figure 3, a wick 3 could be used with a bottle 1 that has multiple compartments. For example, the lower region of the wick 3 section that is made of hydrophobic material 3c would extend into the compartment of the bottle 1 that contains the oil-based liquid, and the lower region of the wick section that is made of hydrophilic material 3d would extend into the compartment of the bottle 1 that contains the water-based liquid.

[0044] It is also not necessary that each section of the wick 3 be made up of porous materials. Transport of a liquid from a reservoir to the surface can also be accomplished by using a non-porous, capillary member. Any number of arrangements is envisioned. For example, the wick can be made of a combination of a porous, hydrophobic material (to transport the oil-based material) and a non-porous, hydrophilic material (to transport the water-based material). Figure 2C shows an embodiment where the hydrophobic section 3a is a porous member and the hydrophilic section 3e is a non-porous capillary member. It is also possible to use two non-porous capillary members as shown in Figure 2D. In Figure 2D, the hydrophobic section 3f is a non-porous capillary member and the hydrophilic section 3e is a non-porous capillary member.

[0045] The preferred pore size of the porous materials will vary depending upon the composition of the liquid that is to be transported from the reservoir. The term pore size is used to mean the size of the interstices of the material. The mean pore size of a wick 3 can be determined by any standard test for determining porosity and pore size distribution. For example, mercury porosimetry is a method that gives information on porosity and pore size distribution for rigid wicks 3. It is based on the measurement of differential increments in the amount of mercury intruded into the wick 3 as a function of increasing applied pressure.

25

[0046] In the case of insect control, it is generally not desired to have the liquid (either oil-based or water-based) evaporate from the surface of the device. This is because the insects are killed upon contact with the insecticide itself, and not upon contact with a vapor form of the insecticide. Of course, some amount of evaporation will occur and cannot be avoided.

[0047] In other applications, however, evaporation of the liquid from the surface of the device is preferred. For example, if the liquid in the device is an insect repellant or a deodorizer, it is preferable that the liquid evaporate from the surface of the device into the ambient air. If evaporation is to be encouraged, then our delivery system can be combined with an electric heater to facilitate the release of the vaporizable material into the ambient air. Figure 4 shows an example of the type of electric heater 7 that may be used for this purpose. In addition, U.S. Patent No. 5,647,053 describes such an electric plug-in heater and is incorporated herein by reference.

[0048] Other means for facilitating the use of the wick-based delivery system of the present invention are also envisioned. For example, the present invention may also be combined with a battery powered fan. Although not required, it is preferable that the wick-based delivery system of this invention be combined with the electric plug-in heater or fan in a removable manner. For example, the wick-based delivery system of the invention may constructed so that the bottle 1 can be combined with an electric plug-in heater 7, for example, in a snap-and-fit manner as shown in Figure 4.

[0049] A wick 3 according to another preferred embodiment of the invention is illustrated in Figures 5A and 5B. In this embodiment, the wick 3 comprises two sections 3g and 3h in the shape of concentric cylinders. Preferably, the inner cylinder 3g is comprised of either a porous ceramic-based material or a porous sand-based material, and the outer cylinder 3h is comprised of a porous plastic material. The material of the inner cylinder 3g is selected to provide desirable wicking properties, such as reduced leakage in the case of ceramics, for example. The plastic outer cylinder 3h, meanwhile, protects the inner cylinder 3g from being damaged during manufacturing, distribution, and handling processes. Additionally, the plastic outer cylinder 3h is capable of forming a tighter seal with the neck closure 2 of the bottle 1 (such as shown in Figure 1) than a strictly ceramic or sand-based wick could form.

Those skilled in the art will appreciate that such a composite wick is useful for transporting even a single liquid.

[0050] While particular embodiments of the present invention have been illustrated and described, it will be apparent to those skilled in the art that various changes and modifications may be made without departing from the spirit and scope of the invention. Furthermore, it is intended that the claims will cover all such modifications that are within the scope of the invention.

10 INDUSTRIAL APPLICABILITY

[0051] The present invention provides a device useful as a means to transport liquid to the surface of a device or to disperse vaporized materials into the ambient air. We envision that this device preferably can be used to transport insecticides to an exposed surface or to dispense fragrances, insecticides, and any vaporizable materials into the ambient air to freshen or deodorize the air or to exterminate airborne pests.

We claim:

1. A composite wick for delivering two liquids with different properties to a surface, the wick comprising:

5 a first section provided for delivering a first liquid to the surface of the wick; and
a second section provided for delivering a second liquid to the surface of the wick.

2. The composite wick of claim 1, wherein the first section is comprised of hydrophobic materials and the second section is comprised of hydrophilic materials.

10 3. The composite wick of claim 2, wherein the first section is comprised of high density polyethylene and the second section is comprised of a ceramic-based material.

4. The composite wick of claim 3, further comprising a plurality of at least one of the
15 first section and the second section.

5. A device comprising:

a container for holding a mixture that contains both oil-based and water-based liquids;
and

20 a porous wick, having a first section comprising hydrophobic material and a second section comprising hydrophilic material, positioned so that a lower region of the porous wick will be in contact with the mixture to be held by the container and an upper region of the porous wick is exposed to the ambient air,

wherein the first section and the second section will be in contact with the mixture to
25 be held by the container and the ambient air.

6. The device of claim 5, wherein the first section is comprised of high density polyethylene and the second section is comprised of a ceramic-based material.

7. The device of claim 5, wherein the wick comprises a plurality of at least one of the first section and the second section.

8. The device of claim 5, further comprising a heater arranged adjacent to the wick for heating liquid drawn through the wick.

5

9. The device of claim 8, wherein the heater is an electric plug-in heater.

10. A device comprising:

a container for holding a mixture that contains both oil-based and water-based liquids,

10 the container having an opening at a top surface of the container; and

a porous wick, having a first section comprising hydrophobic material and a second section comprising hydrophilic material, positioned in the opening of the container such that a lower region of the porous wick will be in contact with the mixture to be held by the container and an upper region of the porous wick is exposed to the ambient air,

15 wherein the opening in the container is substantially sealed by the porous wick.

11. The device of claim 10, further comprising a neck closure having a hole, wherein the neck closure fits tightly into the opening of the container and the porous wick fits tightly into the hole of the neck closure, such that the opening of the container is substantially sealed by
20 the neck closure and the porous wick.

12. The device of claim 10, wherein the first section is comprised of high density polyethylene and the second section is comprised of a ceramic-based material.

25 13. The device of claim 10, further comprising a plurality of at least one of the first section and the second section.

14. A device comprising:

a container for holding a mixture that contains both oil-based and water-based liquids;

and

5 a capillary member, having a first section comprising hydrophobic material and a second section comprising hydrophilic material, positioned such that a lower region of the capillary member will be in contact with the mixture to be held by the container and an upper region of the capillary member is exposed to the ambient air,

wherein the first section and the second section are in contact with the mixture held by
10 the container and the ambient air.

15. The device of claim 14, wherein at least one of the first section and the section is comprised of a non-porous material.

15 16. The device of claim 14, wherein one of the first section and the second section is comprised of a porous material, and the other section is comprised of a non-porous material.

17. The device of claim 14, wherein the first section is comprised of high density polyethylene and the second section is comprised of a ceramic-based material.

20 18. The device of claim 14, further comprising a plurality of at least one of the first section and the second section.

19. A device comprising:

a container for holding both an oil-based liquid and a water-based liquid, wherein the container has separate compartments for holding each liquid; and

5 a porous wick, having a first section comprising hydrophobic material and a second section comprising hydrophilic material, positioned so that a lower region of the first section of the porous wick will be in contact with the oil-based liquid and a lower region of the second section of the porous wick will be in contact with the water-based liquid, and an upper region of both the first and the second sections of the porous wick is exposed to the ambient
10 air.

20. The device of claim 19, wherein the first section is comprised of high density polyethylene and the second section is comprised of a ceramic-based material.

15 21. The device of claim 19, wherein the wick comprises a plurality of at least one of the first section and the second section.

22. The device of claim 19, further comprising a heater arranged adjacent to the wick for heating liquid drawn through the wick.

20 23. The device of claim 22, wherein the heater is an electric plug-in heater.

24. A device comprising:

a container for holding an oil-based liquid and a water-based liquid, the container having an opening at a top surface of the container, and the container having separate

5 compartments for separately holding the oil-based liquid and the water-based liquid; and

a porous wick, having a first section comprising hydrophobic material and a second section comprising hydrophilic material, positioned in the opening of the container so that a lower region of the first section of the porous wick will be in contact with the oil-based liquid and a lower region of the second section of the porous wick will be in contact with the water-
10 based liquid, and an upper region of both the first and the second sections of the porous wick is exposed to the ambient air,

wherein the opening in the container is substantially sealed by the porous wick.

25. The device of claim 24, further comprising a neck closure having a hole, wherein the

15 neck closure fits tightly into the opening of the container and the porous wick fits tightly into the hole of the neck closure, such that the opening of the container is substantially sealed by the neck closure and the porous wick.

26. The device of claim 24, wherein the first section is comprised of high density

20 polyethylene and the second section is comprised of a ceramic-based material.

27. The device of claim 24, further comprising a plurality of at least one of the first section and the second section.

28. A device comprising:

a container for holding an oil-based liquid and a water-based liquid, wherein the container has separate compartments for separately holding the oil-based liquid and the water-based liquid; and

a capillary member, having a first section comprising hydrophobic material and a second section comprising hydrophilic material, positioned so that a lower region of the first section of the capillary member will be in contact with the oil-based liquid and a lower region of the second section of the capillary member will be in contact with the water-based liquid, and an upper region of both the first and the second sections of the capillary member is exposed to the ambient air.

29. The device of claim 28, wherein at least one of the first section and the section is comprised of a non-porous material.

30. The device of claim 28, wherein one of the first section and the second section is comprised of a porous material, and the other section is comprised of a non-porous material.

31. The device of claim 28, wherein the first section is comprised of high density polyethylene and the second section is comprised of a ceramic-based material.

32. The device of claim 28, further comprising a plurality of at least one of the first section and the second section.

33. A device comprising:

a mixture that contains both oil-based and water-based liquids;

a container for holding the mixture; and

5 a porous wick, having a first section comprising hydrophobic material and a second section comprising hydrophilic material, positioned so that a lower region of the porous wick is in contact with the mixture held by the container and an upper region of the porous wick is exposed to the ambient air,

wherein the first section and the second section are in contact with the mixture held by
10 the container and the ambient air.

34. The device of claim 33, wherein the first section is comprised of high density polyethylene and the second section is comprised of a ceramic-based material.

15 35. The device of claim 33, wherein the wick comprises a plurality of at least one of the first section and the second section.

36. The device of claim 33, further comprising a heater arranged adjacent to the wick for heating liquid drawn through the wick.

20 37. The device of claim 36, wherein the heater is an electric plug-in heater.

38. A device comprising:

a mixture that contains both oil-based and water-based liquids;

a container for holding the mixture, the container having an opening at its top surface;

5 and

a porous wick, having a first section comprising hydrophobic material and a second section comprising hydrophilic material, positioned in the opening of the container such that a lower region of the porous wick is in contact with the mixture held by the container and an upper region of the porous wick is exposed to the ambient air,

10 wherein the opening in the container is substantially sealed by the porous wick.

39. The device of claim 38, further comprising a neck closure having a hole, wherein the neck closure fits tightly into the opening of the container and the porous wick fits tightly into the hole of the neck closure, such that the opening of the container is substantially sealed by
15 the neck closure and the porous wick.

40. The device of claim 38, wherein the first section is comprised of high density polyethylene and the second section is comprised of a ceramic-based material.

20 41. The device of claim 38, further comprising a plurality of at least one of the first section and the second section.

42. A device comprising:

a mixture that contains both oil-based and water-based liquids;

a container for holding the mixture; and

5 a capillary member, having a first section comprising hydrophobic material and a second section comprising hydrophilic material, positioned such that a lower region of the capillary member is in contact with the mixture held by the container and an upper region of the capillary member is exposed to the ambient air,

10 wherein the first section and the second section are in contact with the mixture held by the container and the ambient air.

43. The device of claim 42, wherein at least one of the first section and the section is comprised of a non-porous material.

15 44. The device of claim 42, wherein one of the first section and the second section is comprised of a porous material, and the other section is comprised of a non-porous material.

45. The device of claim 42, wherein the first section is comprised of high density polyethylene and the second section is comprised of a ceramic-based material.

20 46. The device of claim 42, further comprising a plurality of at least one of the first section and the second section.

47. A device comprising:

an oil-based liquid;

a water-based liquid;

5 a container for holding both liquids, wherein the container has separate compartments for holding each liquid; and

a porous wick, having a first section comprising hydrophobic material and a second section comprising hydrophilic material, positioned so that a lower region of the first section of the porous wick is in contact with the oil-based liquid and a lower region of the second
10 section of the porous wick is in contact with the water-based liquid, and an upper region of both the first and the second sections of the porous wick is exposed to the ambient air.

48. The device of claim 47, wherein the first section is comprised of high density polyethylene and the second section is comprised of a ceramic-based material.

15 49. The device of claim 47, wherein the wick comprises a plurality of at least one of the first section and the second section.

50. The device of claim 47, further comprising a heater arranged adjacent to the wick for
20 heating liquid drawn through the wick.

51. The device of claim 50, wherein the heater is an electric plug-in heater.

52. A device comprising:

an oil-based liquid;

a water-based liquid;

5 a container for holding the oil-based liquid and the water-based liquid, the container having an opening at its top surface and the container having separate compartments for separately holding the oil-based liquid and the water-based liquid; and

a porous wick, having a first section comprising hydrophobic material and a second section comprising hydrophilic material, positioned in the opening of the container so that a
10 lower region of the first section of the porous wick is in contact with the oil-based liquid and a lower region of the second section of the porous wick is in contact with the water-based liquid, and an upper region of both the first and the second sections of the porous wick is exposed to the ambient air,

wherein the opening in the container is substantially sealed by the porous wick.

15 53. The device of claim 52, further comprising a neck closure having a hole, wherein the neck closure fits tightly into the opening of the container and the porous wick fits tightly into the hole of the neck closure, such that the opening of the container is substantially sealed by the neck closure and the porous wick.

20 54. The device of claim 52, wherein the first section is comprised of high density polyethylene and the second section is comprised of a ceramic-based material.

25 55. The device of claim 52, further comprising a plurality of at least one of the first section and the second section.

56. A device comprising:

an oil-based liquid;

a water-based liquid;

5 a container for holding the oil-based liquid and the water-based liquid, wherein the container has separate compartments for separately holding the oil-based liquid and the water-based liquid; and

10 a capillary member, having a first section comprising hydrophobic material and a second section comprising hydrophilic material, positioned so that a lower region of the first section of the capillary member is in contact with the oil-based liquid and a lower region of the second section of the capillary member is in contact with the water-based liquid, and an upper region of both the first and the second sections of the capillary member is exposed to the ambient air.

15 57. The device of claim 56, wherein at least one of the first section and the section is comprised of a non-porous material.

58. The device of claim 56, wherein one of the first section and the second section is comprised of a porous material, and the other section is comprised of a non-porous material.

20 59. The device of claim 56, wherein the first section is comprised of high density polyethylene and the second section is comprised of a ceramic-based material.

60. The device of claim 56, further comprising a plurality of at least one of the first
25 section and the second section.

61. A composite wick for transporting a liquid to a surface, the wick comprising:
a first section made of either a porous ceramic-based material or a porous sand-based
material; and
5 a second section made of a porous plastic material.

62. The wick of claim 61, wherein the first section and the second section are formed as
concentric cylinders, with the first section being disposed within the second section.


10 63. A device comprising:
a container for holding a liquid the container having an opening therein; and
a porous wick, having a first section made of either a ceramic-based material or a
sand-based material and a second section made of a plastic material,
wherein the opening in the container is substantially sealed by the porous wick.

15 64. The device of claim 63, wherein the first section and the second section are formed as
concentric cylinders, with the first section being disposed within the second section.

20

1/5

FIG. 1

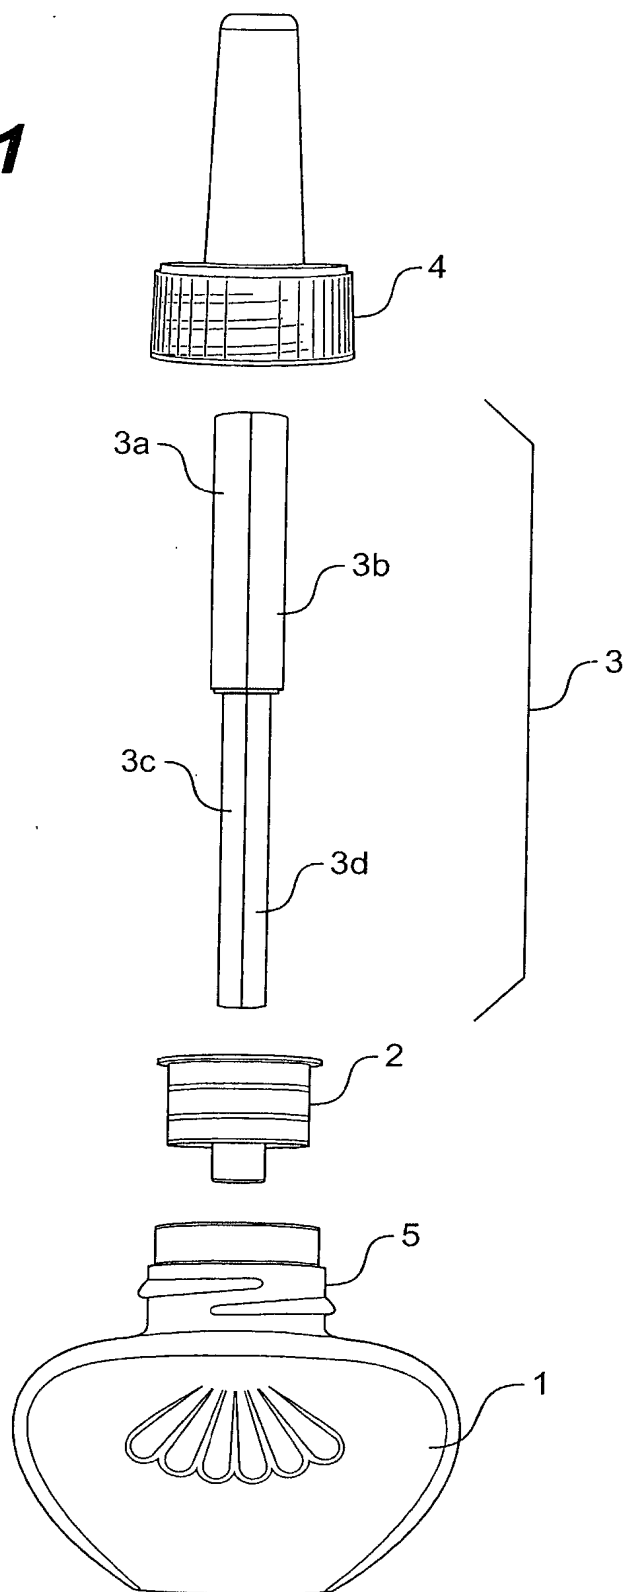

2/5




FIG. 2A




FIG. 2B



FIG. 2C



FIG. 2D

3/5

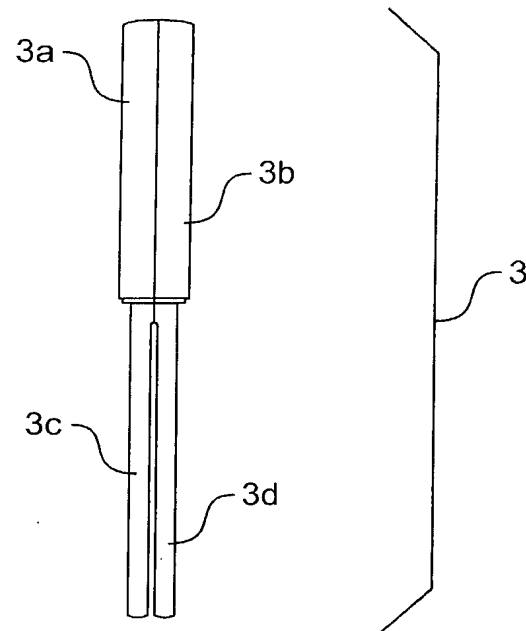


FIG. 3

4/5

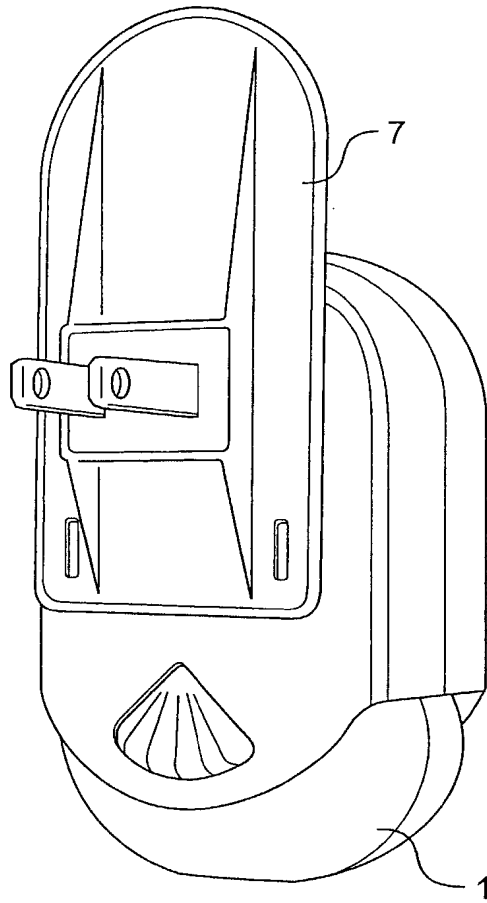


FIG. 4

5/5

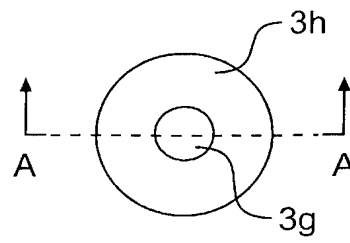


FIG. 5A

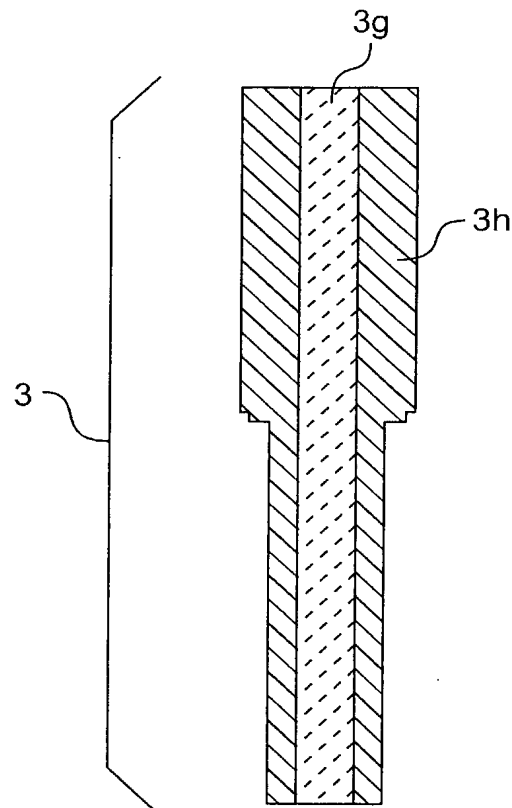


FIG. 5B

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 03/30021

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61L9/12 A61L9/03 A01M1/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61L A01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 194 442 A (FUMAKILLA LTD) 9 March 1988 (1988-03-09) page 3, line 14 - line 42; table 1 ---	1,2,5,8, 10,11, 14,19, 38,42, 61,63
P,X	WO 03 075967 A (DIAL CORP ;TRIPLETT CARL (US); STATHAKIS KRISTOPHER J (US)) 18 September 2003 (2003-09-18) the whole document ---	1
X	US 2 277 377 A (WARNER JOSHUA B) 24 March 1942 (1942-03-24) cited in the application the whole document --- -/--	1

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

2 March 2004

Date of mailing of the international search report

09/03/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Marti, P

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/30021

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	EP 1 247 447 A (C T R CONSULTORIA TECNICA E RE) 9 October 2002 (2002-10-09) claims 1,3 ---	24,25, 28,47, 52,56
X	WO 01 05442 A (LUCIANI ALAIN ;COLLINGWOOD KEITH (GB); RECKITT & COLMANN PROD LTD) 25 January 2001 (2001-01-25) page 2, line 16 - line 31 page 6, line 21 -page 7, line 35; figure 1 ---	24,25, 28,47, 52,56
A	EP 0 669 137 A (LEE DE NV SARA) 30 August 1995 (1995-08-30) column 4, line 53 -column 5, line 18 ---	1-64
A	FR 2 483 782 A (AUVRAY PHILIPPE) 11 December 1981 (1981-12-11) the whole document -----	1-64

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US 03/30021

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2194442	A	09-03-1988	JP 63165182 U	27-10-1988
			JP 63048475 U	01-04-1988
			JP 63085084 U	03-06-1988
			JP 1913102 C	09-03-1995
			JP 6036704 B	18-05-1994
			JP 63063330 A	19-03-1988
			JP 63074440 A	04-04-1988
			AU 594495 B2	08-03-1990
			AU 7743787 A	17-03-1988
			BR 8704524 A	26-04-1988
			CN 87107947 A ,B	31-08-1988
			DE 3737272 A1	01-06-1988
			ES 2005930 A6	01-04-1989
			FR 2606595 A1	20-05-1988
			HK 74691 A	27-09-1991
			KR 9506287 B1	13-06-1995
			US 4968487 A	06-11-1990
			IT 1228951 B	10-07-1991
WO 03075967	A	18-09-2003	US 2003168520 A1	11-09-2003
			WO 03075967 A1	18-09-2003
US 2277377	A	24-03-1942	NONE	
EP 1247447	A	09-10-2002	EP 1247447 A1	09-10-2002
			US 2002146242 A1	10-10-2002
			US 2002076214 A1	20-06-2002
WO 0105442	A	25-01-2001	AU 763789 B2	31-07-2003
			AU 6167000 A	05-02-2001
			BR 0012552 A	09-04-2002
			CA 2379614 A1	25-01-2001
			CN 1361701 T	31-07-2002
			EP 1196203 A1	17-04-2002
			WO 0105442 A1	25-01-2001
			GB 2352180 A ,B	24-01-2001
			JP 2003504158 T	04-02-2003
			PL 353236 A1	03-11-2003
			US 2002159916 A1	31-10-2002
			ZA 200201234 A	11-03-2003
EP 0669137	A	30-08-1995	EP 0669137 A1	30-08-1995
			AU 690182 B2	23-04-1998
			AU 1226995 A	31-08-1995
			BR 9500735 A	24-10-1995
			CA 2143030 A1	25-08-1995
			HU 70705 A2	30-10-1995
			JP 7289138 A	07-11-1995
			NO 950690 A	25-08-1995
			NZ 270553 A	24-10-1997
			PL 307434 A1	04-09-1995
			ZA 9501457 A	27-11-1995
FR 2483782	A	11-12-1981	FR 2483782 A1	11-12-1981